#### Instructions

### **SAFETY PRECAUTIONS**

- 01. While driving, adult supervision is required all the time
- 02. Always wear a helmet when driving
- 03. Please don't drive near road or on the footpath.
- 04. It is not recommended to drive the vehicle on wet surface or on slope greater than 15-degree.
- 05. It is recommended to drive this vehicle on smooth surface only.
- 06. Please don't drive this vehicle outdoors when it is raining.
- 07. Make sure that the vehicle stop completely before changing direction from forward to reverse
- 08. Please don't allow children to operate the charger or play with the battery
- 09. Clean the vehicle with a dry cloth only.
- Please follow the correct weight and age limits allowed to drive this vehicle.
- 11. It is prohibited to change the circuit or add other electric parts.
- 12. Adults must teach their children about safe driving procedures.
- 13. Please turn the power off when not in use.
- 14. Check the seat to ensure it has been fitted and secured with a bolt before driving.
- 15. Inspect all wires and connection of the vehicle periodically.
- 16. Charging the battery should only be done by adults.
- 17. Charging plug is located underneath the seat.
- 18. In order to avoid accidents, please ensure the vehicle is safe before driving.
- 19. Please don't let children touch the wheels or be near them when the car is moving.
- 20. Please mind fingers when opening and closing doors.

#### **WARNING:**

To reduce the risk of injury, adult supervision is required. Never use in roadways, near motor vehicles, on or near steep inclines or steps, swimming pools or other bodies of water; always wear shoes, and never allow more t han 1 rider.

McLaren
Official
Licensed
Product

Item: DK-MGT620

Mclaren GT Ride On Car Age Range: 37-95 Month Maximum Weight: 30 KGS Execution Standard:

GB6675&GB19865 EN71&EN62115 ASTM-F963



# Pinghu Dake Baby Carrier Co.,Ltd

**Address:**No.88,Qinsha section,Pinglang Road,Xincang Town, Pinghu City,Jiaxing City,Zhejiang Province

Website: www.daketoys.com

# **Specifications**

Item	DK-MGT620
Battery&Motor	12V4.5AH+2*25W motors(390 motors) 12V7AH+2*35W motors(550 motors) 12V10AH+2*35W motors(550 motors)
Available Ages	37-95 Months
Maximum Weight	30 Kgs
Size	1080*605*435mm
Speed	3-5Km/H
Charging Time	8-12 H
Remote Control Batteries	2 PCs of AAA Batteries
Charger	Input: 220V/110V Output: DC12V500MA/12V1000MA

### **Charging the Drive Battery:**



**IMPORTANT!** Before using the unit for the first time the battery needs to be charged for at least 8 to 12 hours - no more than 20 hours. Once battery is depleted, recharge for 8 to 12 hours - no more than 20 hours.

#### **IMPORTANT!**

Check the drive battery and charger (supply cord, connector) for wear and damage

1. before charging. Do not charge the battery if damage has occurred. Only replace with the same type and voltage rechargeable battery and charger supplied by the manufacturer.

4.

- Only use the rechargeable battery (or equivalent replacement) and charger supplied with your vehicle.
- Always turn power off and charge battery after riding.
- The drive battery should be charged when depleted, or if not used regularly, once a month. Failure to charge the battery as directed will cause permanent damage to the battery and will void the warranty.

#### STEPS:

- 1. Locate Charging Port.
- Plug Charger plug into unit Charging Port.
- 3. Plug Charger into Wall outlet.
- 4. When battery is fully charged, unplug charger from the wall outlet and disconnect from charger port.

**NOTE:** The charger may feel warm during the charging. If excessively hot, unplug and replace.

**NOTE:** This product has charging protection: When charging, all functions are turned OFF.

### Installation


### Be careful

- 1. When the vehicle is running, do not switch the push handle forward and backward to avoid damaging the gearbox and motor.
- 2.In manual mode, the vehicle can run only when the foot switch is pressed.
- 3. The remote control is used by the guardian.

Problem: The car does not move.

Answer: The battery is low, please charge for 8-12 hours but not exceeding 20 hours.

Charge at least once a month to keep the battery cells active.



To avoid short fuse or power cut off:

- 1. Do not overload the product. Max load is 30 Kg.
- 2. Do not drag any item behind this product.
- 3. Do not allow water or any liquid into electric parts.
- 4. Do not change wire system without a professional.

### **TROUBLESHOOTING**

### Problem: The car only runs for a short time

Answer 1: The battery is low, please charge for 8-12hours but not exceeding 20 hours.

Charge at least once a month to keep the battery cells active. Answer 2: The battery may need to be replaced depending on its charging history and age.


Problem: The sound does not work.

Please ensure the volume is turned up and the MP3 line is not connected. Sounds from steering wheel will not work when MP3 is plugged in.

Problem: Charger overheating

It is normal for battery and charger to be slightly warm during charging. If the charger feel excessively hot, please check for a current overload or battery short circuit.


### Installation



- 1.USB socket 2.TF socket
- 2.11 SUCKEL
- 3.MP3 socket
- 4.Disply
- 5.MODE choose(Radio/Bluetooth/TF card/USB connector)
- 6.Education(Pressing for a longer time and it will lower the volume)
- 7.Story(Play/ Pause under the Bluetooth/TF/USB functions)
- 8.Music(Pressing for a longer time and it will higher the volume)

### **Function indication**

On the premise that the battery has been correctly connected, start the trolley circuit system

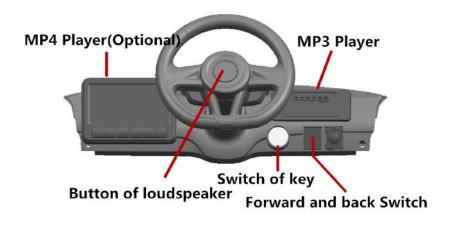


### Installation procedure

# Spare Parts when open the box:


Car body 1 PC	Front window shield 1 PC	Steering wheel 1 PC
Seat 1 PC	Front wheels 2 PCS	Rear wheels 2 PCS
Wheel covers 4 PCS	Rear view mirrors 1 Pair	Charger 1 PC
Instruction manual 1PC	Remote Control 1 PC	Bag of screws&nuts 1 Bag
Keys 2 PCS	Spanner 2 PCS	Sticker of wheel cover 4PCS

## **Spare Parts List:**

### 1. Under Two Motors Version:

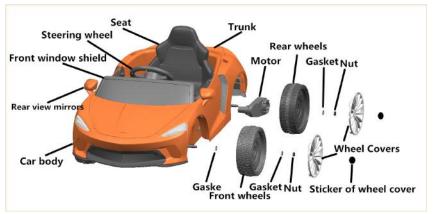

### 2. Under Four Motors Version:

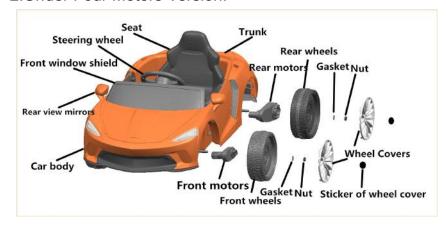

#### Installation procedure

### 1. Install front wheels.

**Under Two Motor Version:** 

- A. Gasket-front wheels-gasket-M10 nut
- B. Wheel cover-Sticker of wheel cover

**Under Four Motor Version:** 

(no plum blossom under four motors version)

- A. Front wheels-gasket-M10 nut
- B. Wheel cover-Sticker of wheel cover



- 2. Install rear wheels.
- A. Motor-rear wheel-gasket-nut
- B. Wheel cover-Sticker of wheel cover



### Instructions

Warning-When replacing a replaceable battery, first openthe lid and take out the old battery. Put in the new battery, pay attention to the positive and negative poles, cover the lid.

# $\triangle$

### **WARNING!**

For safety reasons,

\*please use this vehicle under adult guidance and supervision.

\*do not use this product on main roads, slopes, highways or other dangerous places.

\*children must wear shoes and protective gears when operating the vehicle.

\*children should be seated with the seat belt fasten when driving.

\*only load a maximum of 30Kg on the vehicle.

\*only children aged 37 - 95 months should be allowed on this vehicle.

\*use this toy strictly according to safety manual.

\*please check the tires, breaks, steering wheels, seats and seat belts before operating vehicle.

\*this toy vehicle should be used with caution and requires skill to avoid fall or collision with third parties.

\*Non-rechargeable batteries are no to be recharged;

\*The supply terminals are not to be short-circuited.

\*Rechargeable batteries are to be removed from the toy before being charged;

\*The toy should be regularly examined for damage to the cord, plug,anclosure and other parts,and in the event of such damage,t hey must not be used until the damage has been repaired.

-Only use the battery specified by the manufacturer

-Only use the charger specified by the manufacturer.


Pictures are for reference only, please adhere to the original Products as standard

Pictures are for reference only, please adhere to the original products as standard

**Assembly** 

### Installation procedure

#### Connect with Remote Control



2.4G Remote Control Instructions


Step 1: The Remote Controller is loaded with two AAA batteries.

Step 2: Turn off the power switch on the vehicle.

Step 3: Hold down "▲ " & "▼ " keys for 3 seconds start match code, The first LED flicker, Now turn on the vehicle power switch The red indicator lights stop flashing, and the code is successful.

Keys caption: "S" set up speed, 1 led lit up is low speed, 2 leds lit up is medium speed, 3 leds lit up is high speed,

"▲" Forward, "▼ "Back, "◄ "Left, "▶" Right, Press "P" key hold the brake, All LED flicker




Load two AAA(1.5V) batteries

WARNING! Not for children under 3 years. Small parts. Choking hazard

- -Load two AAA (1.5V) batteries according to the diagram.
- -Non-rechargeable batteries are not to be recharged.
- -Different types of batteries or new and used batteries are not to be mixed.
- -Batteries are to be inserted with the correct polarity.
- -Exhausted batteries are to be removed from the toy.
- -The supply terminals are not to be short-circuited.
- -The packaging must be retained since it contains important information.
- \*Manufactured according to FCC certification testing and ECM credential.
- \*This remote is to be used by adult only.


## Installation procedure

3. Connect power and charge socket.

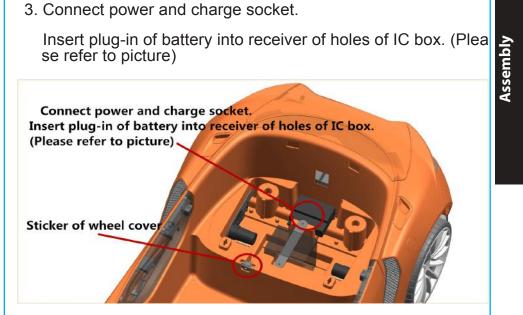


4. Install seat.

Install seat and make the fastener into the sockets, and rot ate 90° to lock well.

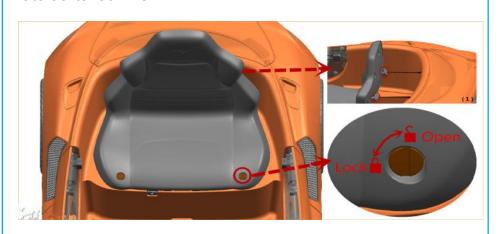


# Installation procedure

- 5. Connect steering wheels.
  - A. Connect lines of steering wheel and lines of dashboard.
  - B. Insert steering wheel directly

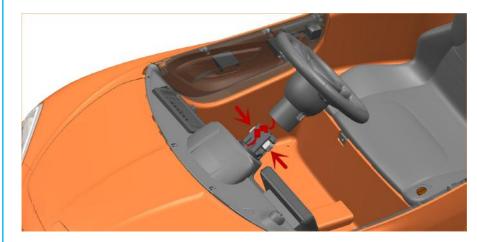


 Install front window shield.
 Make two sides of the window shield into the sockets and insert directly.

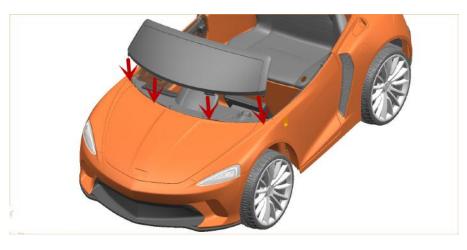


## Installation procedure

 Install rear view mirrors
 Install rear view mirrors into the sockets of both sides of dashboard.

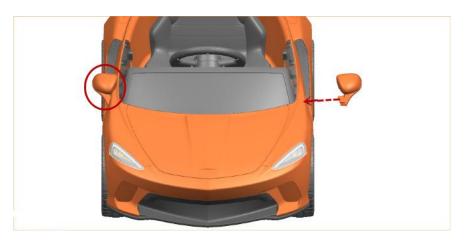

8. Sketch-map of hidden wheels

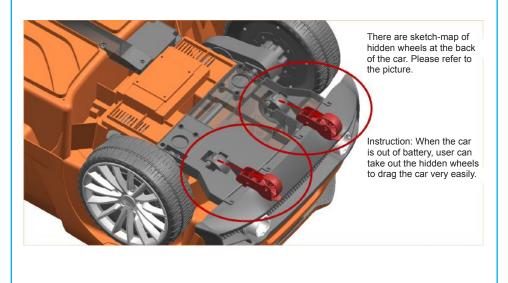

**Assembly**